
PRODUCT DATA SHEET

ART. NO 9308900109
9308900101


POWERDOT CHARGE 01

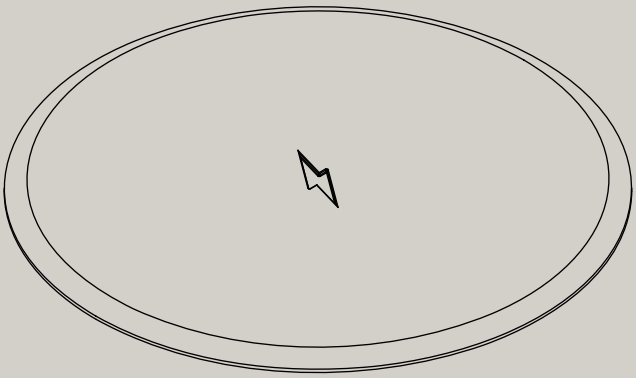


FORMING FUNCTION

Dimensions

See user manual for assembly instructions

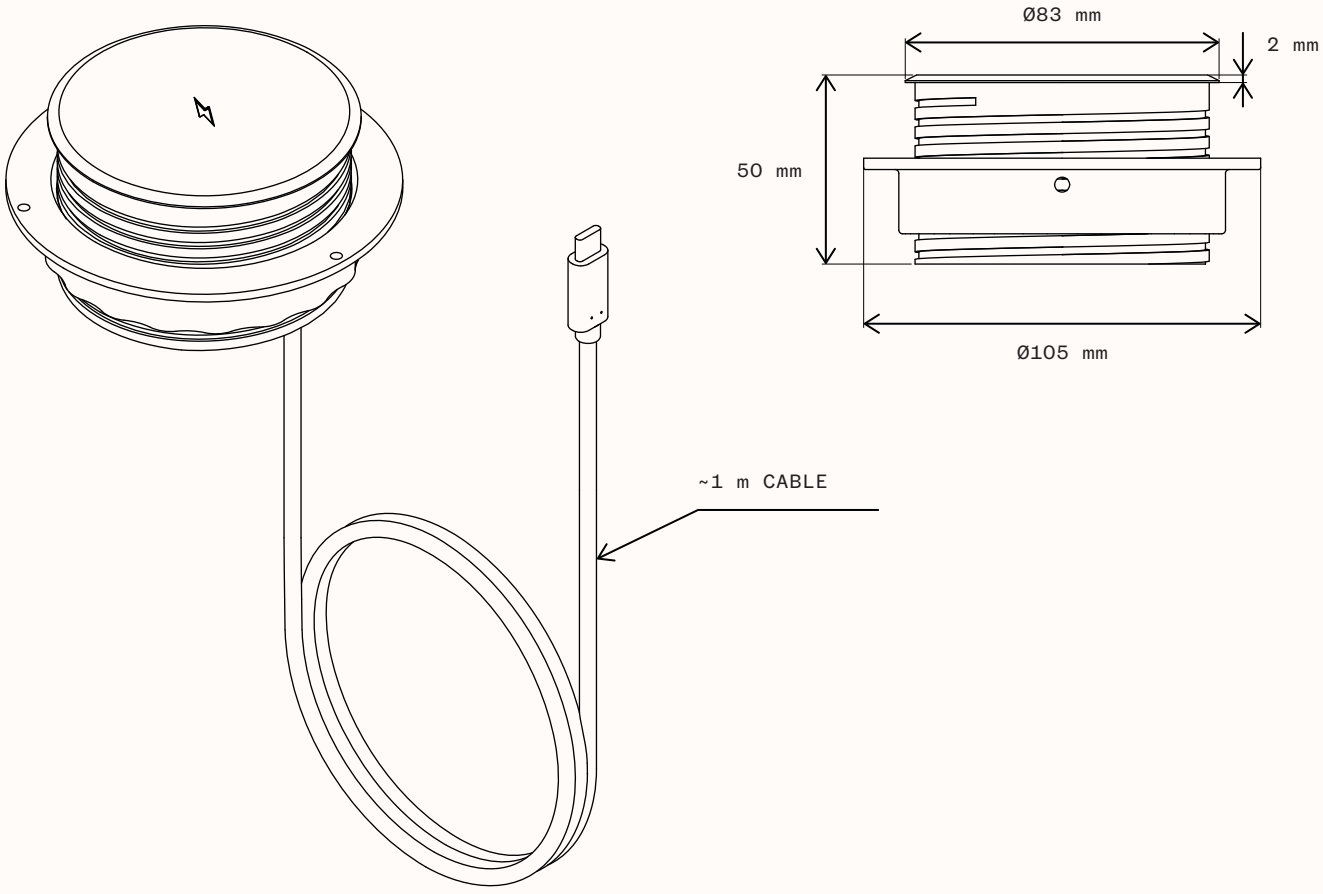

CHARGER WITH EURO PLUG INCLUDED



POWERDOT CHARGE 01

POWERDOT CHARGE 01

WIRELESS CHARGER 15W, BLACK/WHITE

ART.NO

9308900109 BLACK
9308900101 WHITE

Technical data

INTERFACE	WIRELESS CHARGER
OUTPUT WIRELESS CHARGER	15 W
RATED VOLTAGE ADAPTER	250V
RATED CURRENT ADAPTER	16A
OUTPUT ADAPTER	20 W
CABLE & CONNECTOR	~1 m USB-C CABLE, EURO PLUG ADAPTER INCLUDED
MATERIAL	POLYAMIDE
FINISH	MATTE
PROTECTION CLASS	IP20
INSTALLATION HOLE SIZE	Ø79mm
HEIGHT	50mm
DIAMETER TOP	Ø83mm
MAX TABLE THICKNESS	30mm
CERTIFICATIONS	CE, UKCA, RoHS COMPLIANT, CB TESTED

Read before installation and usage



Do not cover

Electrical products may only be daisy-chained if integrated into a fixed installation. Normal power sockets may not be used for the connection to further socket rails.



Incorrect installation may endanger:
- Safety of the installer
- Safety of the end-user and safety of the property.

Incorrect installation may result in personal liability for damage of property or injury to persons.



Electronic equipment is recyclable and should not be disposed of with household waste, if the device has reached the end of its life, dispose of at the recycling points in accordance with local regulations. Disposal with household waste is prohibited



The device may only be used in a dry indoor environment.

For safe installation please ensure the following:

- The 5 safety rules to apply: Disconnect mains; Prevent reconnection; Test for absence of harmful voltages; Ground and short circuits; Cover or close off nearby live parts;
- Choose proper tools, measuring devices and personal protective equipment
- Analyse measured results
- Selection of electrical installation material to ensure switch-off conditions
- IP protection ratings
- Fitting of electrical installation material;
- Type of the feeding system (TN system, IT system, TT system...) and the resulting switching conditions (classic zeroing, protective earthing, necessary additional measures, etc.).

CE RoHS Compliant UKCA